


RT165

TRACK LOADERS



GEHL®

Capacities		Metric	Imperial
Operating Capacity at 35% Tipping Load		748 kg	1649 lbs
Operating Capacity At 50% Tipping Load		1069 kg	2357 lbs
Tipping capacity		2139 kg	4716 lbs
Operating Weight		3638 kg	8020 lbs
Hydraulic tank capacity		39 l	10 US gal
Fuel tank		62.50 l	17 US gal
Displacement		3.30 l	1 US gal
Weight and dimensions			
Overall Operating Height - Fully Raised	h27	4008 mm	158 in
Overall Height to Top of ROPS	h17	1969 mm	78 in
Overall length with bucket	l16	3205 mm	126 in
Overall width less bucket	b1	1727 mm	68 in
Clearance Circle - Rear	wa1	1440 mm	57 in
Reach - Fully Raised	dp1	641 mm	25 in
Dump Height - Fully Raised	h29	2329 mm	92 in
Maximum Rollback Angle - Fully Raised	a4	98 °	98 °
Overall Length without Bucket	l1	2393 mm	94 in
Specified Height	h31	1638 mm	64 in
Reach at Specified Height	r4	559 mm	22 in
Dump angle at specified height	a17	73 °	73 °
Maximum Rollback Angle at Ground	a13	28 °	28 °
Carry Position	d5	198 mm	8 in
Maximum Rollback Angle at Carry Position	a14	28 °	28 °
Digging Position	h32	53 mm	2 in
Track gauge	b10	1407 mm	55 in
Track Shoe Width	b20	400 mm	16 in
Crawler base	y2	1265 mm	50 in
Clearance Radius - Front with Bucket	b18	1979 mm	78 in
Drawbar Pull/Tractive Effort		4345 kg	9579 lbs
Roller Type		Steel	Steel
Track Type		Rubber	Rubber
Track Rollers		4	4
Height to Hinge Pin – Fully Raised	h28	3038 mm	120 in
Bucket Width	e1	1676 mm	66 in
Dump angle at full height	a5	39 °	39 °
Ground clearance	m4	185 mm	7 in
Performances			
Bucket Breakout - Tilt Cylinder		1919 kg	4231 lbs
Bucket Breakout - Lift Cylinder		2295 kg	5060 lbs
Ground Speed - Single Speed		10.50 km/h	7 mph
Engine			
Engine model		4TNV98C-NMS2V Stage V	4TNV98C-NMS2V Stage V
Gross Power (kW)		51.70 kW	51.70 kW
Gross Power		2500 rpm	2500 rpm
Oil Pan Capacity		9 l	2 US gal
Alternator - Voltage		112 V	112 V
Alternator - Ampere		100 A	100 A
Cold Cranking Amps at Temperature (CCA)		950 A	950 A
Engine brand		Yanmar	Yanmar
Number of cylinders		4	4
Battery		12 V	12 V
Hydraulics			
Motor Type		Radial Piston	Radial Piston
Standard flow - Auxiliary hydraulics		71 l/min	71 l/min

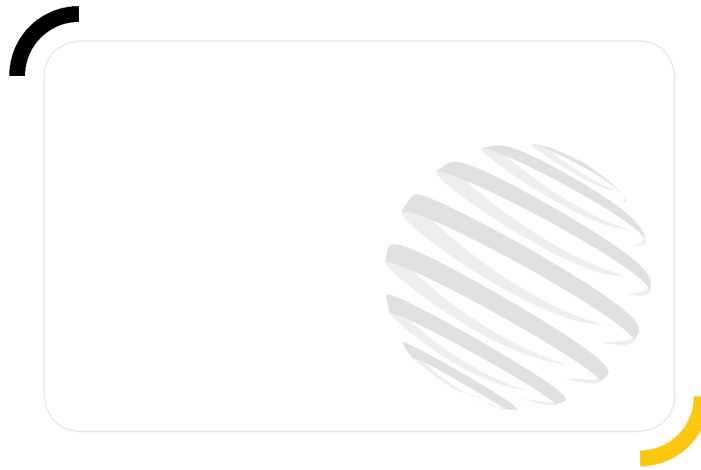

GEHL®

Siège Social
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095
Tel: (262) 334-9461 - Fax: (262) 338-7517
www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend