


**RT135**

**TRACK LOADERS**



**GEHL®**

Capacities		Metric	Imperial
Operating Capacity at 35% Tipping Load		612 kg	1349 lbs
Operating Capacity At 50% Tipping Load		875 kg	1929 lbs
Tipping capacity		1750 kg	3858 lbs
Operating Weight		2953 kg	6510 lbs
Hydraulic tank capacity		34.80 l	9 US gal
Fuel tank		59.40 l	16 US gal
Displacement		2.20 l	1 US gal
Weight and dimensions			
Overall Operating Height - Fully Raised	h27	3670 mm	144 in
Overall Height to Top of ROPS	h17	1930 mm	76 in
Overall length with bucket	l16	3076 mm	121 in
Overall width less bucket	b1	1448 mm	57 in
Clearance Circle - Rear	wa1	1440 mm	57 in
Overall Length without Bucket	l1	2360 mm	93 in
Specified Height	h31	771 mm	30 in
Reach at Specified Height	r4	1494 mm	59 in
Dump angle at specified height	a17	75 °	75 °
Maximum Rollback Angle at Ground	a13	28 °	28 °
Carry Position	d5	165 mm	6 in
Maximum Rollback Angle at Carry Position	a14	28 °	28 °
Digging Position	h32	18 mm	1 in
Angle of Departure with STD Counterweight		28 °	28 °
Track gauge	b10	1148 mm	45 in
Track Shoe Width	b20	300 mm	12 in
Crawler base	y2	1168 mm	46 in
Clearance Radius - Front with Bucket	b18	1918 mm	76 in
Drawbar Pull/Tractive Effort		3248 kg	7161 lbs
Roller Type		Steel	Steel
Track Type		Rubber	Rubber
Track Rollers		4	4
Height to Hinge Pin – Fully Raised	h28	2794 mm	110 in
Bucket Width	e1	1524 mm	60 in
Dump angle at full height	a5	40 °	40 °
Ground clearance	m4	213 mm	8 in
Performances			
Bucket Breakout - Tilt Cylinder		1588 kg	3501 lbs
Bucket Breakout - Lift Cylinder		1692 kg	3730 lbs
Ground Speed - Single Speed		10 km/h	6 mph
Engine			
Engine model		4TNV88C Tier IV / Stage V	4TNV88C Tier IV / Stage V
Gross Power (kW)		34.30 kW	34.30 kW
Gross Power		2500 rpm	2500 rpm
Oil Pan Capacity		6.40 l	2 US gal
Alternator - Voltage		12 V	12 V
Alternator - Ampere		100 A	100 A
Cold Cranking Amps at Temperature (CCA)		800 A	800 A
Engine brand		Yanmar	Yanmar
Number of cylinders		4	4
Battery		12 V	12 V
Hydraulics			
Motor Type		Radial Piston	Radial Piston
Standard flow - Auxiliary hydraulics		63.60 l/min	63.60 l/min

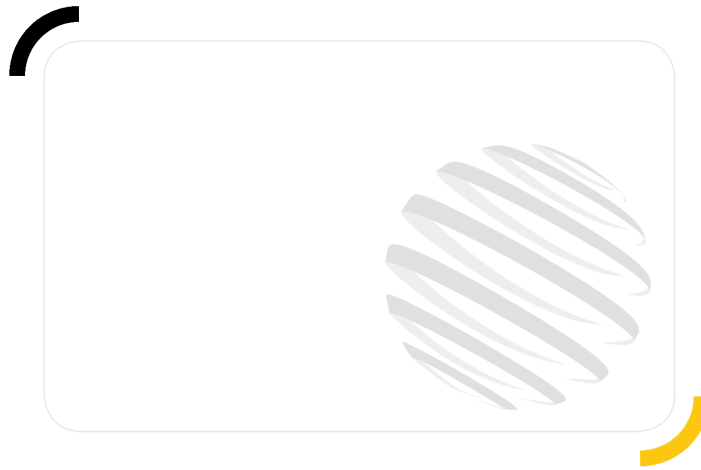

# GEHL®

Siège Social  
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095  
Tel: (262) 334-9461 - Fax: (262) 338-7517  
[www.gehl.com](http://www.gehl.com)



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend